

LAND CORNER RECORD

Index: P-11	Corner: Center 1/4 corner of Section 21	State of Indiana - Hoosier National Forest
Section: 21	Township: 7N Range: 1E P.M.: 2nd	County: Monroe
Coordinate:	Lat./N: 1376918.43 Lon./E: 3142658.59	Datum: NAD83(2011) US survey feet

CORNER HISTORY: (Chronological history of corner)

1.) Date of Survey:	Surveyor:	Monument:	Recording Information:		Monument Photograph: 
c. 1980	USFS Surveyor	Stone	On file in USFS office.		
Reference Objects:	Species:	Diameter:	Bearing:	Distance:	
Record evidence of prior survey:	Found stone				


2.) Date of Survey:	Surveyor:	Monument:	Recording Information:	
06-19-2008	Kevin P. Enright Monroe Co. Surveyor	Limestone	Monroe County Surveyor Monument Record	
Reference Objects:	Species:	Diameter:	Bearing:	Distance:
	Chinquapin Oak	16"	N03°W	8.50'
	Red Oak	20"	S63°E	5.05'
	Yellow Poplar	8"	S03°E	22.70'
Record evidence of prior survey:	Found limestone			

ACCESSORIES: Bearing and distance from monument to witness object.

Reference Objects:	Object or Tree Species:	Diameter:	Bearing:	Distance:
	Mag nail in Tulip Poplar	12"	S24°W	48.30'
	Mag nail in Twin Red Oak	18"	S42°E	5.49'
	Mag nail in Chestnut Oak	20"	N03°W	9.55'
Monument Found or Set:	Found a 5 inch X 9 inch cut limestone, 0.75' above grade.			

MONUMENT SKETCH


NARRATIVE REFERENCE:



Monument is a 5 inch X 9 inch cut limestone, 0.75' above grade, a carsonite post is located 1 foot to the west of the monument. Located 50 feet west of east/west running pine grove. On western slope of northwest running ridge, 200 feet south of ditch line running east to west.

SECTION DIAGRAM

PERPETUATION RECORD:



Corner Location = ●

The origin of this monument is unknown. It is shown on an unsigned USFS survey (c.1980) showing a breakdown of Section 21 on file in the USFS office, and is shown on the hand drawn sketch of Section 21 by Ken Anderson, dated 11-23-1982 (on file in the USFS office).

The record monument was found undisturbed and maintained by remarking the existing bearing trees or establishing new bearing trees. Two existing bearing trees were recovered from a 6/19/2008 Monroe County Surveyor Monument Record and remarked, and one new bearing tree was established.

Bearing Trees were marked with a blaze, scribed B.T., bearing tree sign, paint, and nail where permission was granted by adjoining landowner.

Section: 21 T7N R1E

Prepared By: BRG (Project#3-565)

Date: 6/2015

Referenced on BRCJ survey recorded as InstNo.2016001724

Accepted by the Monroe County Surveyor Review Board on August 6, 2019.

MONUMENT RECORD
State of Indiana - County of Monroe

Section: 21

Township: 7 North


Range: 1 East

Corner ID: Polk K-15

Monument Description & Remarks: Limestone. Survey Sign 5ft above ground at pt. B

References On File: Kenneth Anderson survey, (1986), on file Surveyor Office

RECOVERY TIE DRAWING
Field Book 41 Page No. 03

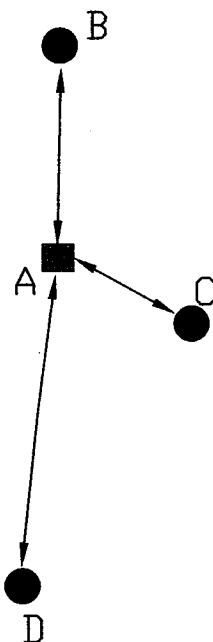


A - Limestone

B - N 03° W 8.50' to Survey
Sign on 16" Chinquapin Oak

C - S 63° E 5.05' to MAG
nail in 20" Red Oak

D - S 03° E 22.70' to MAG
nail in 8" Yellow Poplar

Not To Scale
Compass Bearing Magnetic North



I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of section 36-2-12-11 of the Indiana Code; and the above data is given under my hand and seal this 19th day of June, 2008.

Kevin P. Enright

Administered by the Monroe County Surveyor Review Board

Date: 7-6-2008

